


Pivot Door System Selection Guide

Scan for
More Information

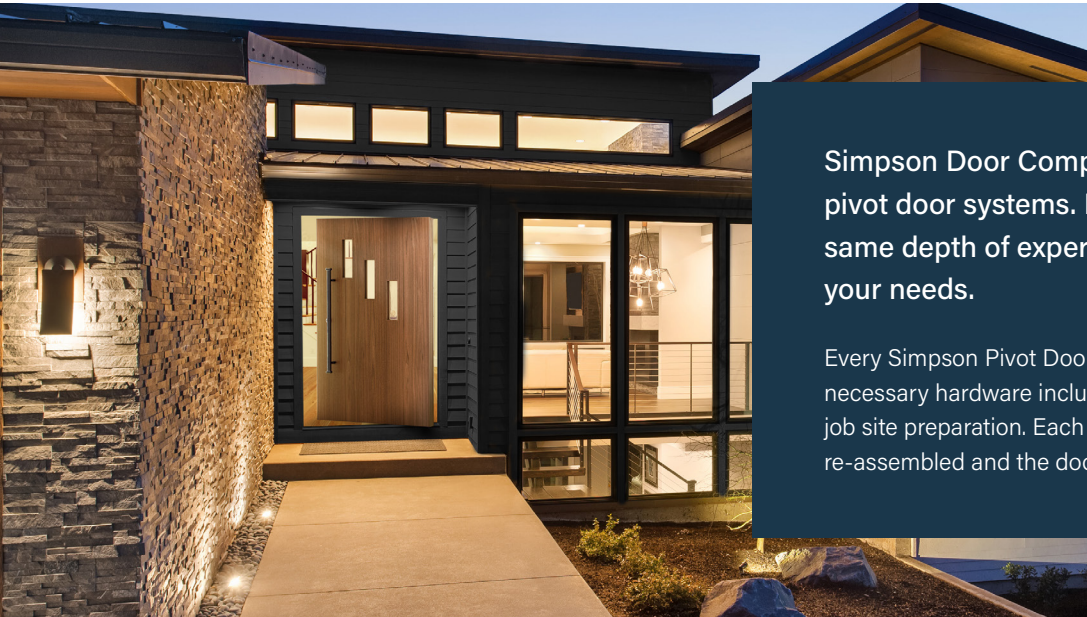

Simpson Door Company is the industry leader in wood pivot door systems. No other manufacturer offers the same depth of experience and range of options to meet your needs.

Every Simpson Pivot Door System comes fully equipped with all necessary hardware included in the door unit - eliminating additional job site preparation. Each system is fully crated, with the frame re-assembled and the door packaged separately within the same crate.

System	Exterior Luxury	Exterior Standard	Interior Luxury	Interior Standard
Available Door Thickness	2-1/4"	1-3/4" or 2-1/4"	1-3/4" or 2-1/4"	1-3/8" or 1-3/4"
Available Door Widths	3'6" through 5'0"	3'0" through 5'0"	3'0" through 5'0"	Any width up to 5'0"
ADA Compliant	✓	✓	✓	Yes, for Doors 3'0" or Wider.
Available Door Heights	up to 10'0"	up to 10'0"	up to 10'0"	up to 10'0"
Locking System	Multipoint with Roller Latch	Double Bore	Single Bore	Single Bore
Available Hardware	Stainless Steel or Matte Black Pull	N/A	N/A	N/A
Sill	ADA Aluminum Sill with UltraBlock® Substrate	ADA Aluminum Sill with UltraBlock® Substrate	N/A	N/A
Weathertight System	Weatherstrip on Jamb Legs, Double Brush for Top of Door, Single Brush for Bottom of Door	Weatherstrip on Jamb Legs, Single Brush for Top of Door, Staple on Sweep for Bottom of Door	N/A	N/A



Pivot Door System Options



WHERE CUSTOMIZATION MEETS CRAFTSMANSHIP

2 Exterior and 2 Interior Systems to Choose From

Unmatched Visual Impact

- Make a statement with a Monster XL-size door for the entry or special space in the home.
- Select sizes 3'0" to 5'0" in width and 10'0" in height.
- Door rotates around a pivot hinge as an inswing door unit.
- Can be combined with virtually any door design for architectural consistency in your project.

Options for Any Home and Application

- **Exterior Luxury System**
 - » Includes Multipoint Locking System with Roller Latch (can be used with Door Pulls both sides)
 - » Adjustments can be made to how the door swings and closes
 - » For doors 2-1/4" thick and between 3'6" and 5'0" wide
- **Exterior Standard System**
 - » Double bore for field applied latch and lock system
 - » For doors 1-3/4" or 2-1/4" thick and between 3'0" and 5'0" wide
- **Interior Luxury System**
 - » For doors 1-3/4" or 2-1/4" thick and between 3'0" and 5'0" wide
- **Interior Standard System**
 - » For doors 1-3/8" or 1-3/4" thick and any width up to 5'0"

No Hassle Installation

- Install in a new or existing opening, using the installation template and guide.
- All hinge and locking mechanisms are located within the door unit itself. Threshold and header plates are installed in the frame. Nothing to be placed into the subfloor or header.
- Low-profile hinge plate to be installed in floor for interior applications.
- Final speed and latching adjustments done easily after door is operational with included installation toolkit.

